

# HAWKER AERO


## 28V Portable Starting Units Model 2880

The all-new Hawker Aero GPU utilizes the latest technology in Lithium batteries.

These batteries provide the same power as the lead-acid type but are 70 percent lighter and 50 percent smaller. In addition, These Lithium GPU batteries have twice the battery life of lead-acid batteries.

The modular design allows two GPUs to be paralleled to double the continuous output and battery capacity.

This unit is designed for engine starting only.

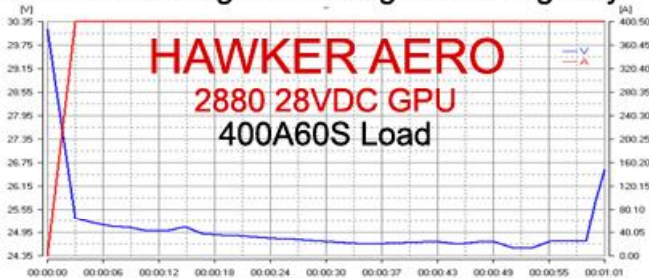

### Specifications

- Peak Current 2700A
- Max continuous amps 800A5S 400A100S
- Nominal voltage DC28.5V (27V-30.3V)
- Max voltage DC30.5V
- Amp/hour capacity 80Ah@10hr rate(20°C)
- Operating temp -30°C to +60°C(-22°F to +140°F)
- Case Aluminum,superficial static electricity spurts
- Aircraft cable 2m(6ft)with Nato connector
- Input voltage 90-240VAC 50/60HZ
- Input current ≤35A
- Dimensions H355L457W137mm(H15L18W5 In)
- Weight 19kgs(42lbs)
- Supplied with unit Charger,Aircraft cable

PLEASE NOTE: Never run the batteries down below 25 volts,during a start is okay.  
When the battery automatically shuts down due to zero charge, please recharge immediately.

### Supplied as standard with



### Optional extras



All HAWKER products come with a 1-year warranty on workmanship and materials. Batteries are cycle-dependent and therefore are not covered under this warranty. Batteries have no memory effect and can be recharged at anytime.

Hawker Aero International Limited

[www.hawker aero.com](http://www.hawker aero.com)

Email:[sales@hawker aero.com](mailto:sales@hawker aero.com)

Agency